


Surface Protection Mat

Product sheet

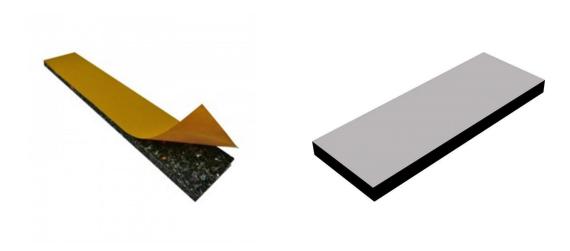

Technical Details

Material EPDM Rubber (Ethylene Propylene Diene Monomer Rubber)

Design & UseSurface Protection Mat is a safeguard for flat roof solar setups. Flame-resistant shield

features a laminated underside, fortified with an aluminum foil. Offers enhanced water-proofing defense, shielding against damage caused by solar module platforms. EPDM has good low-temperature properties, with elastic properties to temperatures as low as -40°C

depending on the grade and the formulation.

Warranty 10 years according to our Guarantee Terms and Conditions.

Length 310 mm

Height 6 mm

Width 12 mm

Thermal expansion Linear coefficient $160\mu m/(m-K)$

Colour Black with Aluminum underlayment

V1 PRODUCT SHEET

SOLARIMEX BV TEL.: +32 11 307 750

VLINDERSTRAAT 20 INFO@SOLARIMEX.BE

3550 HEUSDEN - ZOLDER WWW.SOLARIMEX.BE

BELGIUM VAT BE0782 885 515